

**** PROPRIETARY DATA ****
 THIS DOCUMENT CONTAINS DATA WHICH IS PROPRIETARY OR CONFIDENTIAL TO WV COMM (WV COMMUNICATIONS INCORPORATED). THIS DOCUMENT AND THE DATA CONTAINED HEREIN SHALL NOT BE USED, DUPLICATED, OR ALTERED WITHOUT THE EXPRESSED WRITTEN CONSENT OF WV COMM. ALL RIGHTS ARE RESERVED.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	RELEASED	2-01-05	J.M.
	B	CORRECTED J3 PIN-OUTS 13 & 14	2-14-05	J.M.
	C	Specifications Update	9-14-06	J.M.

D

C

B

A


D

C

B

C

A

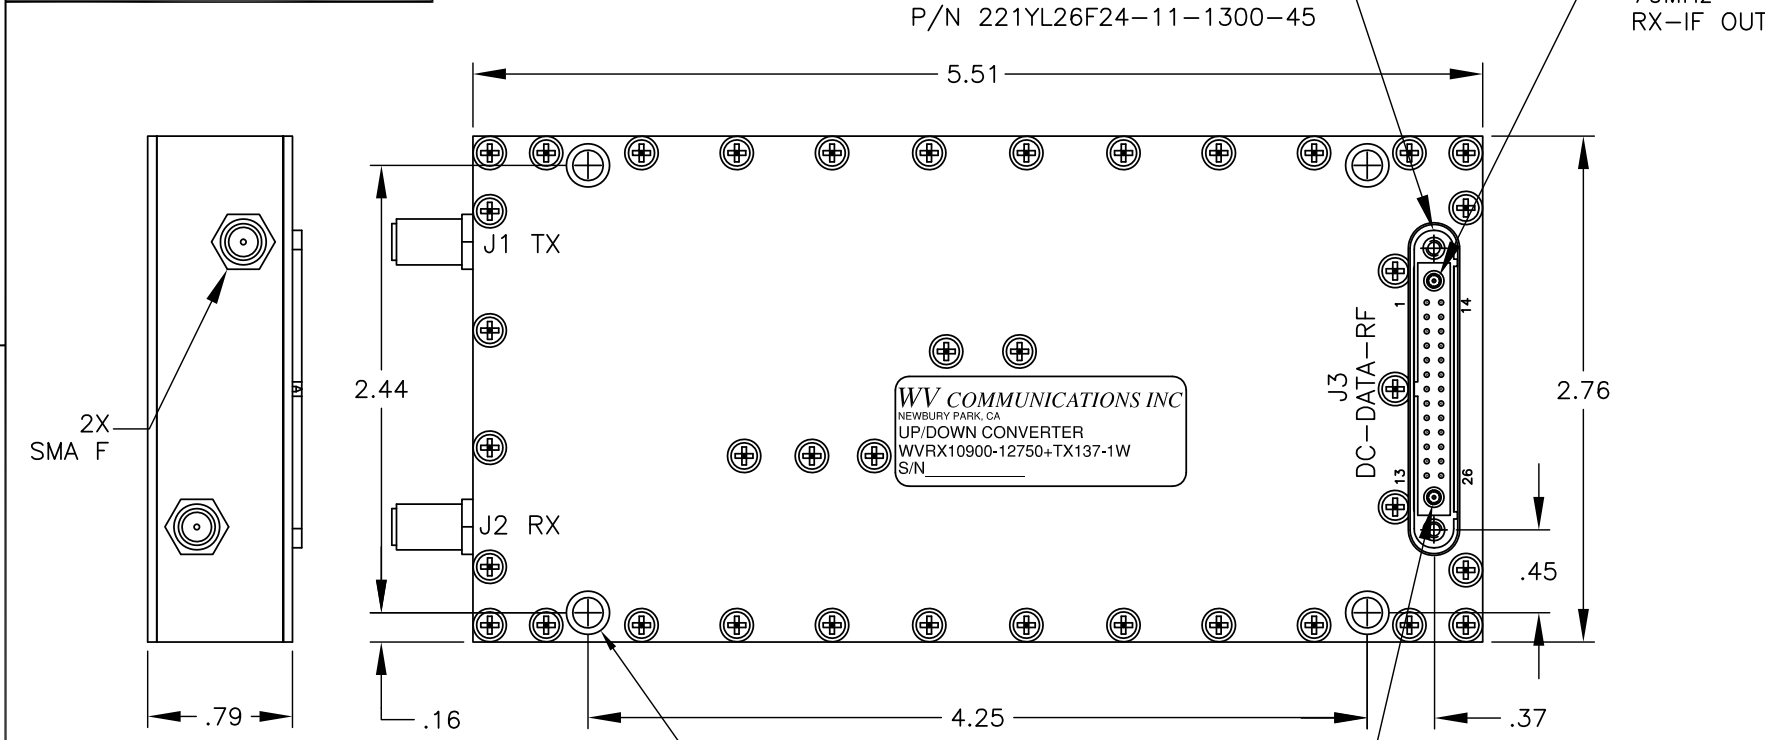


J3 - DC-DATA-RF	
PIN NO.	DESIGNATION
1	V-BAT-P
2	V-BAT-P
3	V-BAT-P
4	GND
5	TX-ON-OFF
6	RS-232-TX
7	RS-232-RX
8	RS-232-CLK
9	TX-I-IN-H
10	TX-Q-IN-H
11	SPR4
12	AGC-CONT-IN
13	SPR6
14	V-BAT-N
15	V-BAT-N
16	V-BAT-N
17	GND
18	RX-ON-OFF
19	SPR1
20	SPR2
21	SPR3
22	TX-1-IN-L
23	TX-Q-IN-L
24	TCXO-V-IN
25	Option-TCXO-ADJ
26	UDC Reset
RF-1	RX-IF-OUT
RF-2	TCXO-OUT

TX Specifications
TX FREQUENCY BAND: 13.75-14.5GHz
FREQUENCY STEP: 125.0KHz Nominal
RF POWER OUTPUT: +30dBm Minimum (-1) +33dBm Minimum (-2)
FREQUENCY STABILITY: 10.00MHz \pm 0.5ppm Maximum Over Temperature
FREQUENCY SWITCHING TIME: 0.5mSec Maximum
MODULATION: QPSK
I/Q DATA INPUT LEVEL: 0.5 - 0.8 Volt RMS
UN-CODED DATA RATE: 1Mbps
POWER CONTROL RANGE: 15.5dB in 0.5dB steps Nominal
POWER GAIN VARIATION: 0.6 dB p-p Maximum
HARMONICS: -60dBc Maximum
SPURIOUS LEVEL: -50dBm Maximum
OUTPUT IMPEDANCE: 50 Ohm
OUTPUT VSWR: 2:1 Maximum (Ref 50 Ohm)
OUTPUT SSB NOISE: -65dBc Maximum @ 1KHz Offset
 -70dBc Maximum @ 10KHz Offset
 -80dBc Maximum @ 100KHz Offset
 -100dBc Maximum @ 1MHz Offset
OUTPUT NOISE LEVEL: -140 dBm/Hz Maximum
DUTY CYCLE: 25%
LO LEAKAGE: -30dBc Maximum
TCXO VOLTAGE: 3.3 \pm 0.1 Volt at 3.0mA Maximum
ON / OFF CONTROL: TTL "0" = On TTL "1" = Off
DC VOLTAGE & CURRENT: 5.6Vdc to 7.6Vdc at 800mA (-1)

RX Specifications
RX FREQUENCY BAND: 10.7 to 11.7GHz OR 11.7-12.75GHz (To be specified at time of order)
FREQUENCY STEP: 125.0KHz Nominal
FREQUENCY SWITCHING TIME: 0.5 mSec Maximum
LO 1 FREQUENCY: 8.8 to 10.8 GHz in 10.0MHz Steps
LO 2 FREQUENCY: 1820.0 to 1830.0 MHz in 125.0KHz Steps
MODULATION: QPSK
L-BAND OUTPUT GAIN: 30dB Minimum
70MHZ IF OUTPUT GAIN: 50 to 80 dB Nominal User Controlled
70MHZ IF FILTER: 3dB BW 0.5MHz Nominal
 35dB BW 1.28MHz
DYNAMIC AGC: 30dB Min
IF AGC CONTROL INPUT: 0 - 3V/1mA Maximum
NOISE FIGURE: 2.5dB Maximum at +25C (2dB Typical)
LO SSB NOISE: -65dBc Maximum @ 1KHz Offset
 -70dBc Maximum @ 10KHz Offset
 -80dBc Maximum @ 100KHz Offset
 -100dBc Maximum 1MHz Offset
1dB COMPRESSION: +10dBm at the 70MHz IF output Port
GAIN VARIATION: \pm 5dB Maximum
SPURIOUS: -60dBm Maximum
IMAGE REJECTION: 40dBc Minimum
IF HARMONICS: -40dBc Minimum
INPUT/OUTPUT IMPEDANCE: 50 Ohm Nominal
INPUT VSWR: 2:1 Maximum (Ref 50 Ohm)
TX REJECTION: 50dB Minimum
RX SENSITIVITY DEGRADATION: 1dB Maximum with 20dB KU Output / Input Isolation
ON / OFF CONTROL: TTL "0" = On TTL "1" = Off
DC VOLTAGE & CURRENT: 5.6V at 100mA Maximum
 7.6V at 150mA Maximum
CPU SLEEP MODE CURRENT: 0.5mA Maximum
REMOTE CONTROL: Via RS-232 3.3V 9600N81
TEMPERATURE RANGES: Operating -10 to +70 Deg C
 Storage -40 to +85 Deg C

CONNECTOR TABLE	
REF DESIG.	FUNCTION
J1	RF OUTPUT
J2	RF INPUT
J3	DCD-DATA-RF

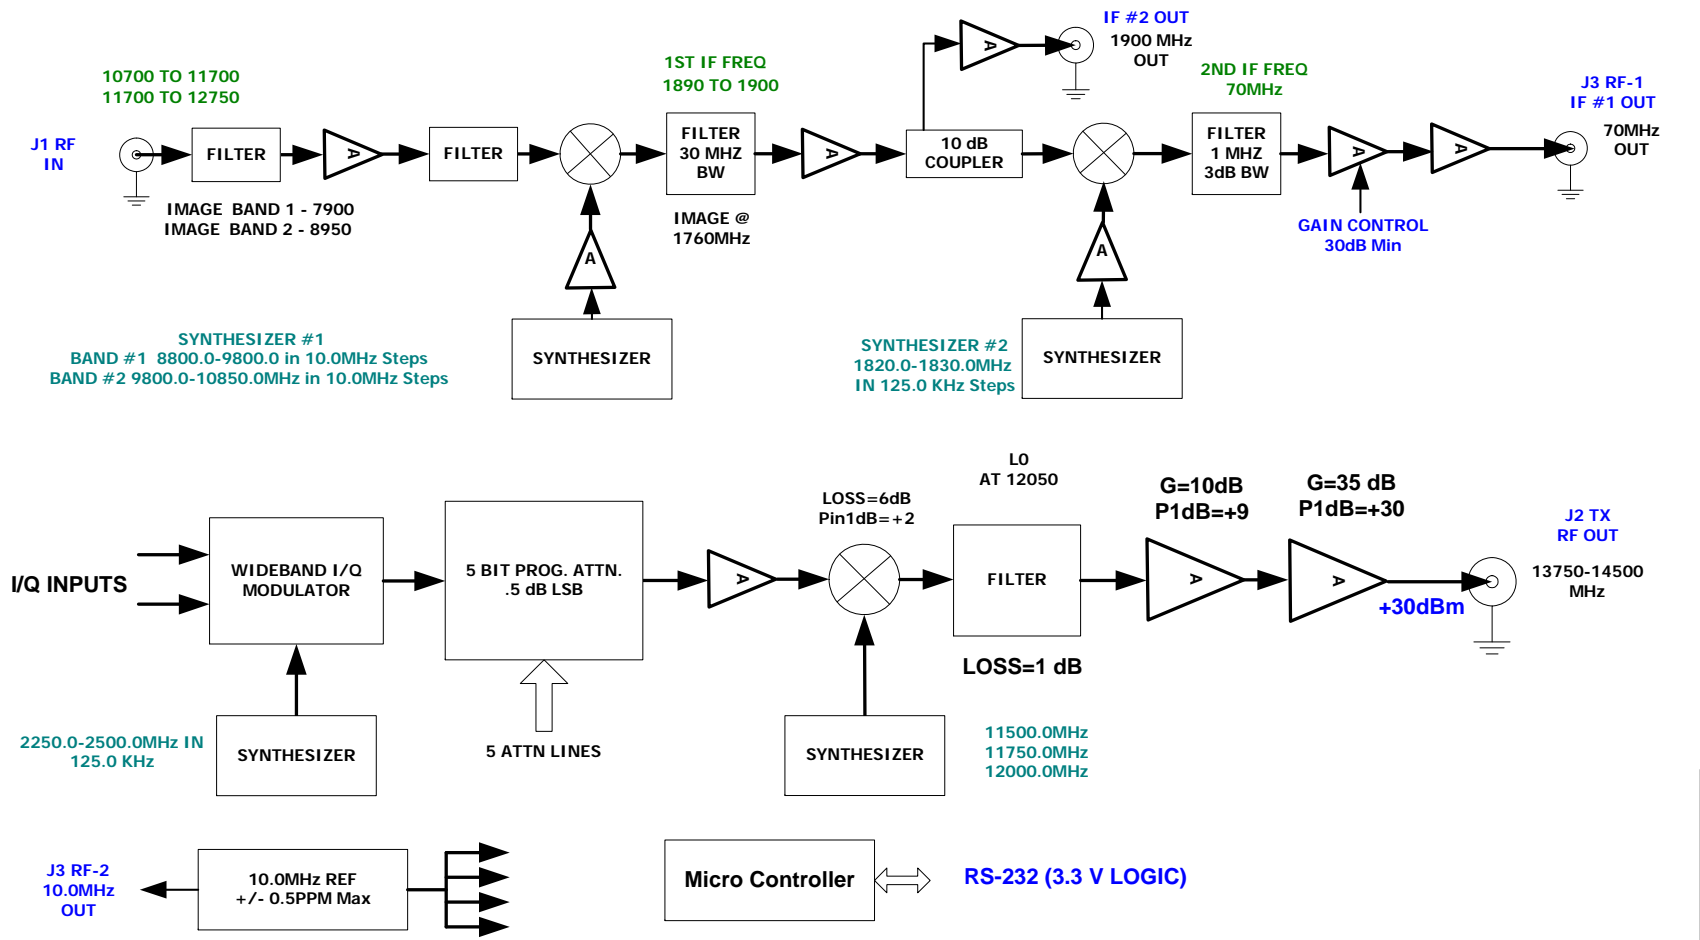

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES ARE:				APPROVALS	DATE
FRACTIONS	DECIMALS	ANGLES	HOLES	DRAWN TONY T.	07/27/04
\pm 1/64	.XXX-01	10°-90°	.XXX-005		
MACHINED FINISH: 32 RMS REMOVE BURRS .005 MAX	.XXX-005		.XXX-001	CHECKED J. MEDINA	2-01-05
MATERIAL				MECH ENGR TT	2-01-05
				ELEC ENGR JT	2-01-05
900-50141				PRODUCTION AM	2-01-05
NEXT ASSEMBLY USED ON				Q.A.	2-01-05
APPLICATION	DO NOT SCALE DRAWING			DB	2-01-05

WV Communications 1176 Tourmaline Dr. Newbury Park, Ca.

Mini Ku Up/Down Converter, 1 Watt
 MODEL: FC1000

SIZE	CAGE CODE	DWG. NO.	REV
D	1GFQ7	050-50454	C

SCALE NONE SHEET 1 OF 1

REV. C 050-50454